

FOLNET *power*

controlled by microcontroller



1. Introduction

An electroluminescence lamp is basically a light emitting capacitor. It works as a multilayer capacitor with pigment and the isolation as dielectric material. So, connected to a suitable inverter, its load is mainly capacitive.

Driving Voltage / Operating Voltage

The crystals in the pigment layer start emitting light at about 20VAC. This is the minimum voltage at which the field strength is high enough to excite electrons which cause light emission.

The luminance and the achieved brightness is dependent from the amplitude of the driving voltage.

An Increase of the frequency of the driving voltage causes a colour shift towards shorter wavelengths. This gives the impression of a higher luminance. The amplitude and frequency should be adjusted close to the recommended operating data of the el-lamp and to the needs of the application carefully. This is because the useful lifetime of the el-lamp will decrease with higher operating voltages and frequencies.

Shape of Driving Voltage

Current through the el-lamp with shapes other than sinusoidal is not favourable. Because no smooth current shapes as a square or a triangle cause high peaks in charging and so may harm the pigment layer and reduce the useful lifetime.

Useful Lifetime

The useful lifetime of el-lamps is directly dependent of amplitude, frequency and shape of the driving ac-voltage. The recommended driving conditions are to be looked up in the datasheets of the el-lamps.

Advantages and Features of EL-Lamps

- EL-lamps are active light emitting sources which have attributes of indirect light, which is the same as light reflected on a ideal dull area.
- EL- lamps are so called Lambert-light sources. That means the luminance of their surface is equal and constant on the whole area.
- The light of an el-lamp is free of glare and homogenous. This is the basic condition for illumination without shadows
- The light of an el-lamp has a narrow band, nearly monochromatic, absolutely homogenous and is visible in far distances.
- The light of an el-lamp is easy on eyes, because of the absence of uv in the spectrum
- The light of an el-lamp are sturdy and not sensitive towards vibration and acceleration.
- El-lamps can be shaped easily because of the small thickness.
- El-lamps are not sensitive towards low and high temperatures

- The self-heating is minimal. Therefore applications even under thermal sensitive conditions are possible.
- EL-lamps have a very good fail-safe behaviour. The brightness in operation decreases slowly with the shape of an e-function. There will not be an immediate fail as at bulb-lights
- Operation at night and under bad conditions has several advantages compared to conventional light sources: because of the kind of the light, visibility in fog or in smoke is best.
- The possible geometric shapes are infinitely including cut outs within the area.

The device **FOLNET *power*** is designed to operate with el-lamps. Due to its high output power it can drive el-lamps up to a size of 18.000cm². The use of a microprocessor, which controls all internal and supervises all external functions, ensures a high level of reliability in function and operation.

2. Description and Features

- all functions controlled by a **microcontroller**
- **Sinusoidal shape of output voltage**. independent of el-foil connected
- infinitely **variable amplitude** of output voltage
- infinitely **variable frequency** of output voltage
- **8 effects implemented**, variable in repetition time and speed
- **active overload regulation** via microcontroller

3. Technical Data

Folnet power	
Mains Supply	230 VAC / 50 - 60 Hz
El-Foil-Connector	2-pole: AMP
mains separation	no
output voltage	0.VAC...135 VAC eff.
output current	limited electronically, short circuit protected
output frequency	400 Hz...750 Hz
integrated effects	8 Flash, Blink, Sine, Triangle, Sawtooth, Sawtooth inverted, Disco, Steps
options	effects by customer definition,
overload display	LED
suitable EL-Foil-size (dependent on foil capacitance and power- consumption)	up to 18.000 cm ²
housing	Metal
dimensions [mm] (BxHxT)	158 x 75 x 140

4. Functions and Operating Controls

The setup listed below can be adjusted on the front panel with potentiometers

- **Amplitude**

Adjustment of the output voltage infinitely variable from about 0 VAC up to 100 VAC .

- **Frequency**

Adjustment of the frequency of the output voltage infinitely variable from 400Hz up to 1000 Hz.

- **Speed**

Adjustment of the speed and repetition of the effect

- **Effect**

Selection of the effect

Nr. 0]	no effect
Nr. 1]	Flash
Nr. 2]	Blink
Nr. 3]	Sine
Nr. 4]	Triangle
Nr. 5]	Sawtooth
Nr. 6]	Sawtooth inverted
Nr. 9]	reserved
Nr. 7]	Disco
Nr. 8]	Steps
Nr. 9]	reserviert

- **Overload LED**


If the maximum output power is reached or exceeded (e.g. foil capacitance too high) the output voltage is reduced so far that just no overload takes place. In this case the red LED is lit on, indicating the output power limitation.

In case of a short circuit at the output, the power stage of the folnet is immediately switched off. The red LED is blinking, a reset can be carried out by switching power off / on.

- **Mains Switch**

A built-in neon indicates the ON condition.

- **Option Remote Control Input** at the back panel (1/4" Jack)
With the help of the remote control feature the amplitude of the output voltage can be controlled with a DC-voltage.
The input is separated by optocoupler from mains and output.

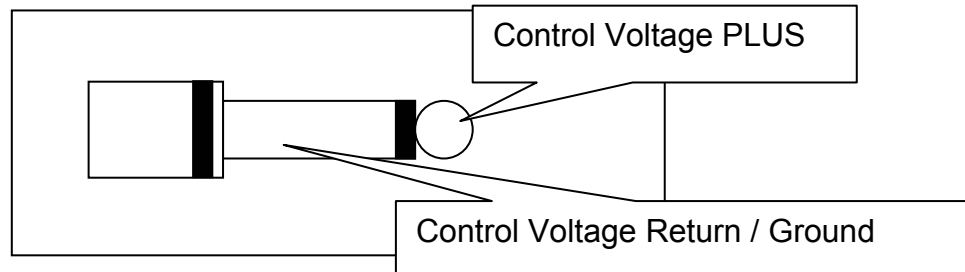

Remote Control: Amplitude variable on DC voltage

Depending on Model: 0...5V or 0...10V

$U_{ctrl} = 0\text{ V} - U_a \text{ Folnet} : U_{min}$

$U_{ctrl} = 5\text{V}/10\text{ V} - U_a \text{ Folnet} : 135\text{ VAC}$

5. Hints

The amplitude and the frequency of the output voltage should be adjusted to needs of the application and the specification of the el-foil carefully. Because the lifetime of the el-foil is directly dependent of these parameters. Because of voltage and frequency being too high, lifetime is reduced.

TIP

Make a setup only to the minimum required needs. By this the lifetime of the el-foil is enlarged.

ATTENTION , HIGH VOLTAGE

This device has **no mains separation!** The output terminals are connected to mains are not protected again earth-shortage!

When operating in test applications or with not isolated connections, an additional mains separation has to be used.

Operate the device only in circuits being protected with suitable fuses.

EMC

These devices may cause emc disturbances in ambient environment. In this case the operator has to care for adequate solutions.

MOUNTING AND POSITION

It has to be cared for good ventilation of the environment and it has to be prevented that the ventilation drills in the housing are not covered.

6. Hints for Safety and Warning




**ATTENTION:
DISCONNECT MAINS PLUG WHEN
CONNECTING EL_LAMP WITH FOLNET !**



**ATTENTION:
THERE IS NO MAINS SEPARATION !**

- This device generates dangerous electrical voltages. For this reason the device may be operated and connected by technically skilled and qualified personal only.
- All manual operations with disconnected mains plug
- All manual operations on this device, have to be in compliance with all specific national security guidelines.
- The producer of the device or the installation is responsible for the compliance with limits of EMC .The way of connection of input and output lines may change the behaviour concerning EMC. For this reason the device may be operated and connected by technically skilled and qualified personal only.

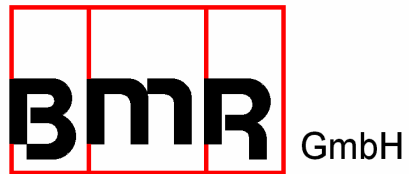

Walpersdorferstr. 38
D 91126 Schwabach
Tel.: +49 (0)9122 63148-0
Fax.: +49 (0)9122 63148-29
e-mail: Info@bmr-gmbh.de
Internet: www.bmr-gmbh.de

subject of change.
edition : 31.01.2012